OAKVIEW GARAGE DOORS

COMMERCIAL SECTIONAL STEEL DOORS

Made for daily use. Specified for your space.



Insulated door systems, practical hardware and lift options.
A clear starting point for your next commercial opening.

SHIPPING AVAILABLE ACROSS CANADA

C400 FLUSH • C500 GROOVED

CHOOSE THE LOOK

Two panel styles

Select a clean, flush face or a traditional horizontal profile.



C400 FLUSH

A smooth, modern face for a simple architectural finish.



C500 GROOVED

Subtle horizontal lines add a classic sectional-door look.



WINDOW OPTIONS

Black frames only • Glass or polycarbonate

Sizes: 23 × 7 in or 26 × 13 in

COLOUR OPTIONS

Commercial Brown

White

Black

INSIDE THE PANEL

Insulation with a full thermal break

Construction details vary by model. We confirm the selected specification on your quote.

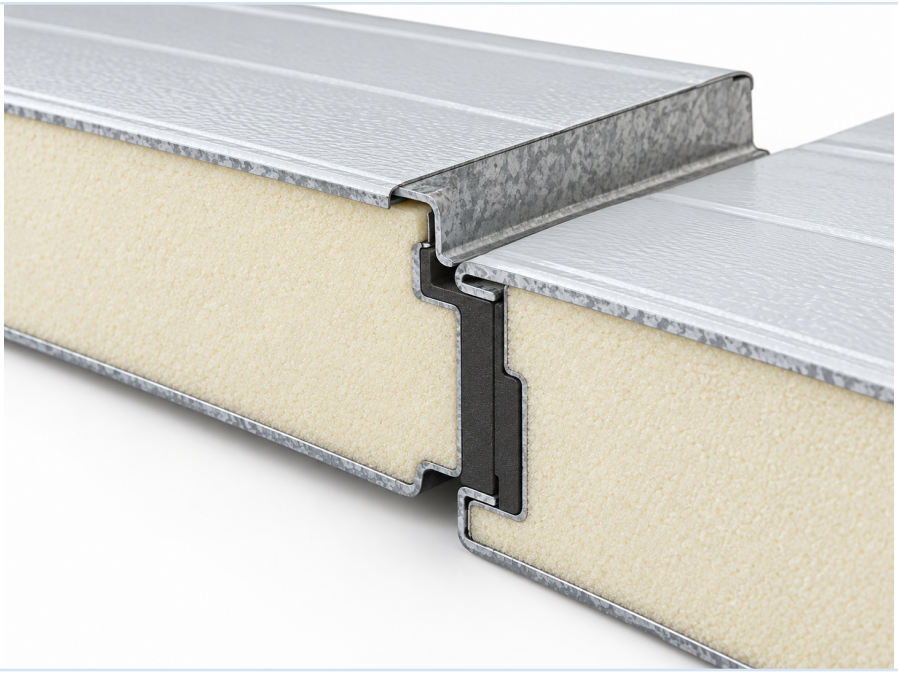

C400 FLUSH 2 in panel • 26-gauge galvanized steel • R-value 18.4

C500 GROOVED 2 in panel • 24-gauge galvanized steel • R-value 18.4

- CFC-free polyurethane insulation
- Tongue-and-groove panel joints with full thermal break
- Steel reinforcement supports secure hinge placement
- Polyurethane primer and polyester top coat

TRACK LAYOUTS

Use the available headroom

A site measurement helps determine the right track path and clearances.

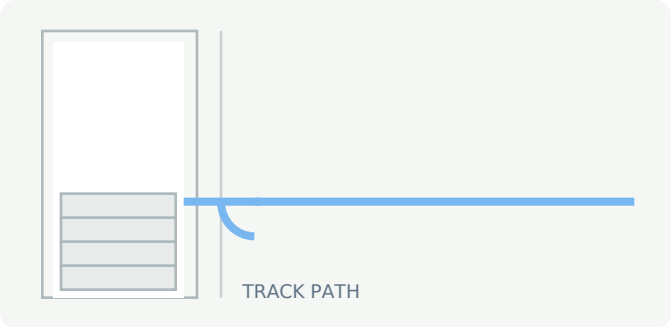

STANDARD LIFT

Rises, then curves into horizontal track.

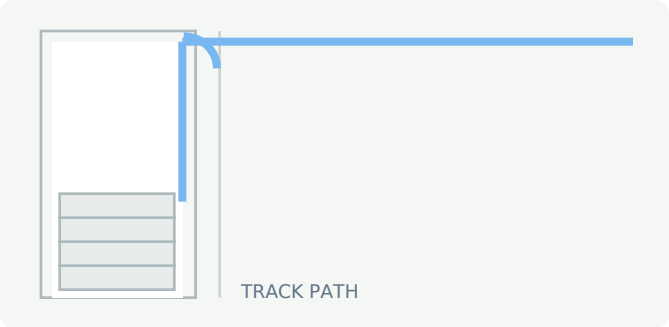

HIGH LIFT

Travels higher before curving overhead.

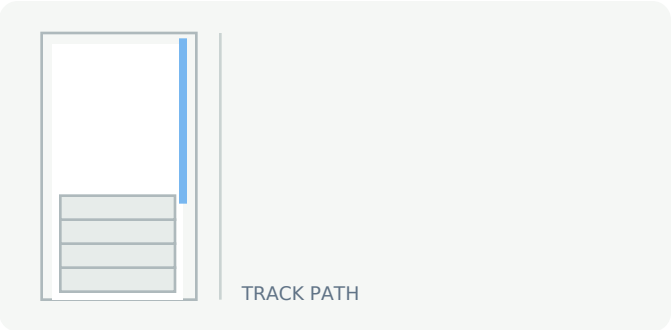

FULL VERTICAL

Travels straight upward beside the opening.

Final lift type and track geometry depend on opening height, headroom and door size.

COMPONENTS

Select the right hardware package

Track, rollers, shaft and spring cycle are matched to the door and installation.

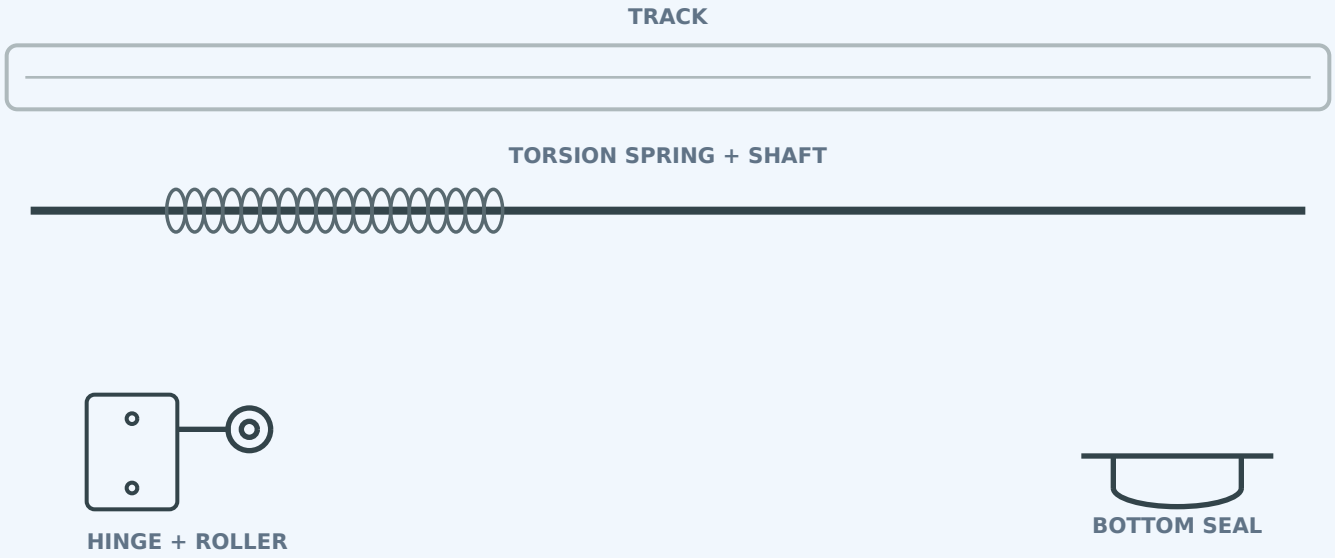

2-INCH TRACK SET

- 2 in track rail with brackets
- 2 in nylon rollers
- Tube shaft and hinge options
- PVC plastic bottom retainer with 3 in bottom seal
- Full plastic weatherstripping

3-INCH TRACK SET

- 3 in track with full vertical angle mounting
- 3 in steel rollers
- Solid shaft and hinge options
- Aluminum retainer with 3 in rubber bottom seal
- Aluminum weatherstripping

SPRING CYCLE OPTIONS

Available ratings: 10,000, 25,000 and 50,000 cycles. The correct spring is sized to the door and confirmed with the final quote.

For a recommendation, send us the opening width, height and available headroom.